



MULTI-POINT ENTRANCE TRIM SETS

general information

A multi-point trim set includes:

- two backplates
- two levers
- cylinder
- inside turnpiece
- 8mm spindle
- through-bolts
- All entry sets include fastening devices to accommodate standard 1-3/4" to 1-7/8" thick doors. Please specify thickness when used on doors other than standard. We can accommodate doors up to 2-1/4" thick. See Pricing Catalogue for thick door up-charge.

When ordering trim for multi-point the door manufacturer must be specified. We supply trim for the following manufacturers at standard pricing:

- | | | |
|------------|-------------------|-------------------|
| • BILTBest | • Crestline | • Eagle* |
| • Hurd | • Kolbe and Kolbe | • Lincoln |
| • Lowen | • Norco | • Pella |
| • Pozzi | • Semco | • Sierra Pacific* |
| • Vetter | • Windsor | • Willmar* |

**Specify Profile Cylinder, or American Style Cylinder*

Special Pricing for all trim for doors by:

- Anderson
- Marvin Ultimate
- Weather Shield

For all other doors call for quote for special machining. Surface mount screws available upon request when ordering. For extended levers (to provide clearance for blinds on door) call for pricing. Our normal extensions add 1-1/4" to the original lever's projection from the door. Extended levers must be assembled to the complete trim set at time of production, not intended for assembly in the field.



03: Active Trim for American Style Cylinder

03-1/2: Patio Trim for American Style Cylinder



09FD: Full Dummy for American Style Cylinder



03P: Active Trim for European Profile Cylinder

1/2P: Patio Trim for European Profile Cylinder



09FD: Full Dummy for European Profile Cylinder




Section D Multipoint Trim

Multipoint Trim



EXAMPLE OF ORDERING: LEVER ONLY - PLATE - FUNCTION



41 Plate 03 Function

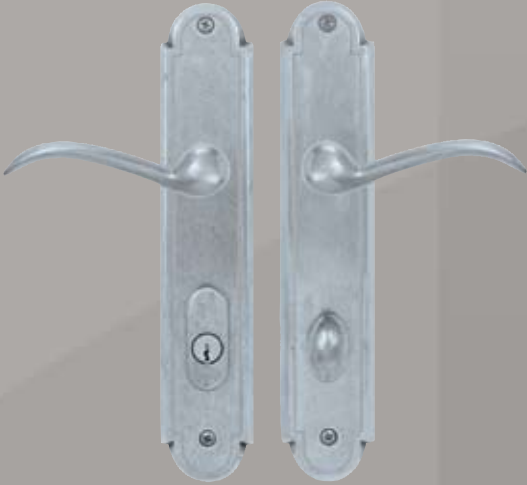


Plate Size: 2" x 10"

41N Plate 03 Function



Plate Size: 2" x 10"

41S Plate 03P Function

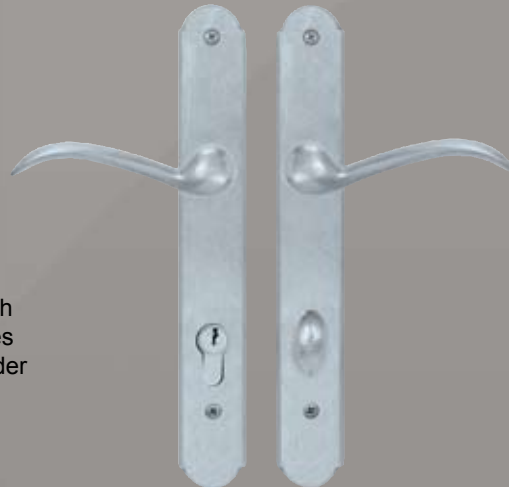



Plate Size: 1-1/2" x 10-1/2"

Note: Our trim sets do not include strikes. Customer's strikes can be re-finished to match trim only if their strikes are solid brass. Strikes must be supplied for re-finishing at time of order entry, so they may be finished with trim sets. Refer to price catalogue.

Lever/Knob	Plate	Function	Description	H	T
2,4,7	41, 41N	-03	Active Trim for American Style Cylinder	X	X
2,4,7	41, 41N	-03-1/2	Patio Function for American Style Cylinder	X	X
2,4,7	41, 41N	-03P	Active Trim for Profile Cylinder	X	X
2,4,7	41, 41N	-1/2P	Patio Function for Profile Cylinder	X	X
2,4,7	41, 41N	-09FD	Full Dummy	X	X
2,4,7	41S	-03	Active Trim for American Style Cylinder	X	X
2,4,7	41S	-03-1/2	Patio Function for American Style Cylinder	X	X
2,4,7	41S	-03P	Active Trim for Profile Cylinder	X	X
2,4,7	41S	-1/2P	Patio Function for Profile Cylinder	X	X
2,4,7	41S	-09FD	Full Dummy	X	X

Split Finish up-charge: Refer to pricing catalogue.
 Split Trim up-charge: Refer to pricing catalogue.
 N = No Line


H = indicate handing of door
 T = indicate thickness of door



2 length 4-4/8" projection 2-1/4"



4 length 4-3/8" projection 2-1/2"



7 length 5-3/8" projection 2-3/4"



EXAMPLE OF ORDERING: LEVER ONLY - PLATE - FUNCTION



71 Plate 03P Function



Plate Size: 2" x 10"

71N Plate 03P Function

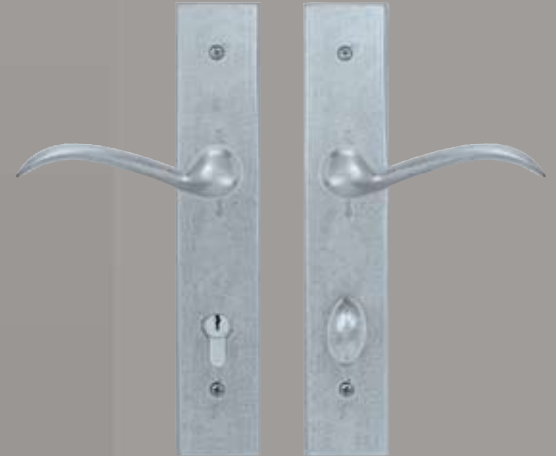


Plate Size: 2" x 10"

71S Plate 03 Function




Plate Size: 1-1/2" x 10-1/2"

Note: Our trim sets do not include strikes.
Customer's strikes can be re-finished to match trim only if their strikes are solid brass. Strikes must be supplied for re-finishing at time of order entry, so they may be finished with trim sets. Refer to price catalogue.

Lever/Knob	Plate	Function	Description	H	T
2,4,7	71, 71N	-03	Active Trim for American Style Cylinder	X	X
2,4,7	71, 71N	-03-1/2	Patio Function for American Style Cylinder	X	X
2,4,7	71, 71N	-03P	Active Trim for Profile Cylinder	X	X
2,4,7	71, 71N	-1/2P	Patio Function for Profile Cylinder	X	X
2,4,7	71, 71N	-09FD	Full Dummy	X	X
2,4,7	71S	-03	Active Trim for American Style Cylinder	X	X
2,4,7	71S	-03-1/2	Patio Function for American Style Cylinder	X	X
2,4,7	71S	-03P	Active Trim for Profile Cylinder	X	X
2,4,7	71S	-1/2P	Patio Function for Profile Cylinder	X	X
2,4,7	71S	-09FD	Full Dummy	X	X

Split Finish up-charge: Refer to pricing catalogue.
Split Trim up-charge: Refer to pricing catalogue.
N = No Line


H = indicate handing of door
T = indicate thickness of door



2 length 4-4/8" projection 2-1/4"



4 length 4-3/8" projection 2-1/2"



7 length 5-3/8" projection 2-3/4"