


INSTALLATION INSTRUCTIONS

Seamless Transaction with Enhanced Product Features delivered on time and quality correct.



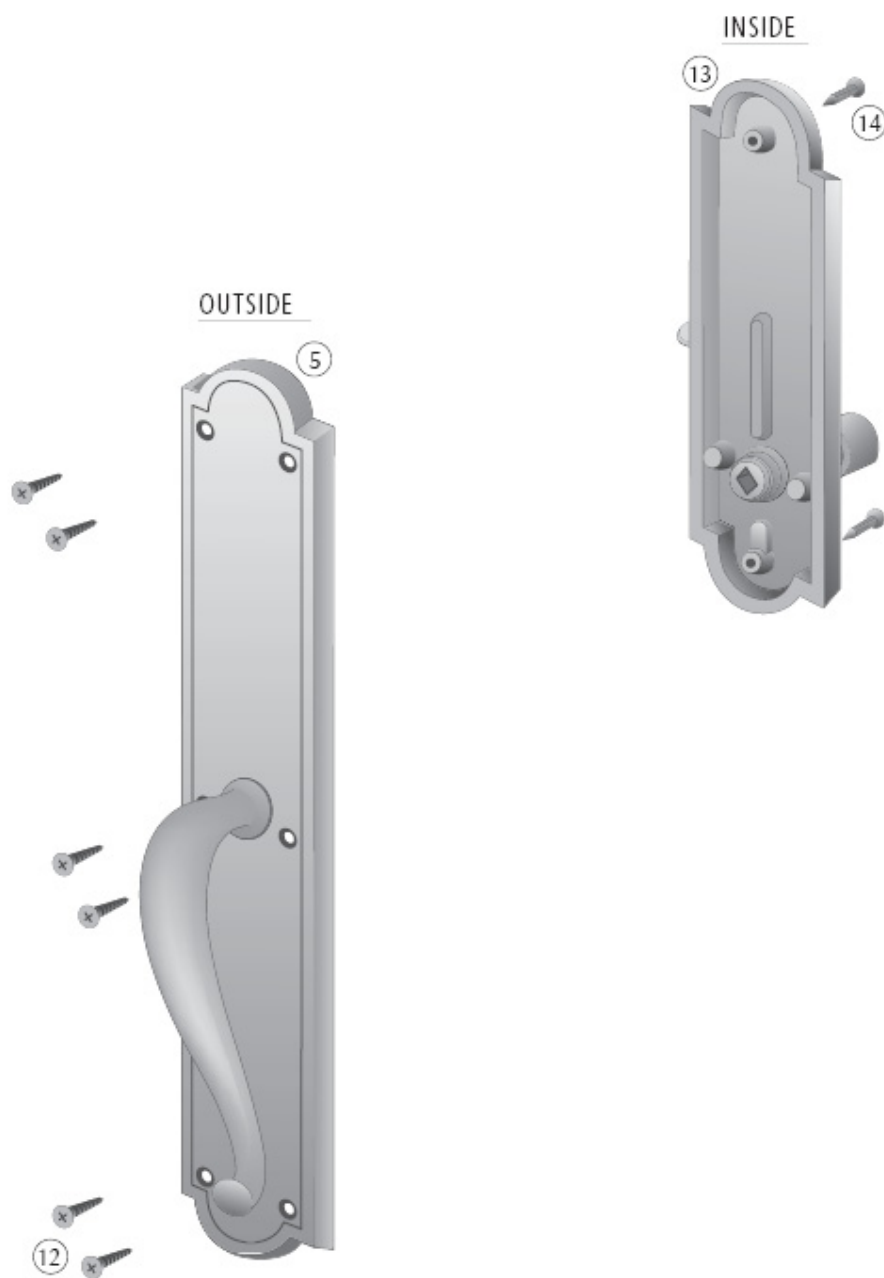

INSTALLATION INSTRUCTIONS

Seamless Transaction with Enhanced Product Features delivered on time and quality correct.

25 FUNCTION

TRIM:

- A. Align the edge of the trim (5) parallel to door and securely tighten screws (12) to the outside trim (5).
- B. Fasten trim to inside of door using screws (14). We recommend the use of a #5 VIX bit to pilot the screw holes for these screws. (If you do not have one, use a 3/32" drill bit to pilot the holes.) Hand tighten the screws, a power driver may strip them.